

DOUBLE USB CHARGER - 45439 S

DESCRIPTION



Double USB Charger - 2100 mA – Allows to charge portable devices, chargeable by means of USB door (smartphones, tablets, MP3, etc.).

Mechanisms from **série QUADRO 45**


Compatible with **série mec 21** | **LOGUSSM** | **sirius70** | **APOLO 5000** using the adapter X0881 T of each Series.

Available in the colours **BR** - White, **MF** - Ivory, **GE** - Ice, **PE** - Pearl, **AL** - Aluminium, **IS** - Gray, **DU** - Gold, **PM** - Black


TECHNICAL CHARACTERISTICS

- Material Characteristics:**
 Thermoplastic Mechanism - resistant material, non-conducting material.
 Mechanism 45x45;
 Weight: ≈ 40g;
- Electrical Characteristics:**
 Voltage / Frequency: 100~240v/AC 50~60Hz;
 Output voltage: DC 5V ±3%;
 Output current: 0~2100mA;
 Output maximum power: 10.5W Max;
 Efficiency: 78%;
 Standby consumption: 0.2W Max;
 insulation resistance: 500v DC/100MΩ;
- Climatic Characteristics:**
 Operating temperature: -10°C~+40°C
 Operating humidity: 20%~90% RH

DIMENSIONS (MM)

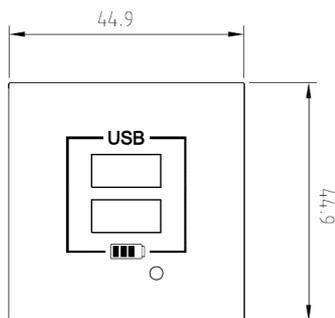

SCHEME CONNECTION

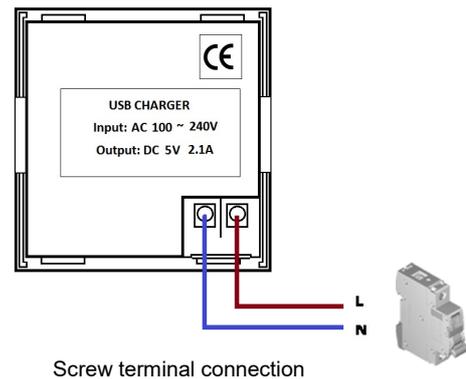

Note: It is recommended to install this socket as terminal equipment in the circuit.

Cleaning: Use a dry cloth to clean (Do not use abrasive products)